



Fig. Safe CP25, hinge right
E-Lock M-Locks EM3520, 2 shelves

EN1143-1
Burglary protection

EN15659
Fire protection

VdS
Grade III

ECB-S
Grade III + LFS30P

ISO
Class EN 3

R2D
Class III E

Domestic insurable
up to EUR 200.000

Commercial insurable
up to EUR 100.000

[Safes]

[Type CP]

In addition to the qualities of the CM safes, the CP series safes also offer certified protection against fire. Additional heat absorbent materials and fire and smoke protection seals in the door rebates provide fire protection – tested and certified in grade LFS30P.


[Product information]

- Hinge DIN right – model designation R
option: DIN left
- Door opening angle 180°
- Body double-walled, reinforced, filled with armoured, high resistant barrier and heat absorbent materials
- Door structure triple-walled with double rebate, reinforced, filled with armoured, high resistant barrier material and heat absorbent materials, internal boltwork protected by sheets of hardened steel to give extra anti-drill resistance, door rebate fitted with several fire and smoke protection seals
- Locking mechanism boltwork with large steel bolts,
protected by additional emergency re-lockers,
continuous fixed full height bolt on the hinge side
- Anchoring prepared for floor and rear wall anchoring
anchoring bolts and shields are supplied
- Alarm connection VdS-certified cable channels to allow connection to a burglar alarm system
- Colour inside and outside RAL 7037 dusty grey
option: special colour according to RAL
- Lock model designation K – double-bit lock VdS class 2, S+G 2 keys (140 mm)
model designation E – electronic lock VdS class 2, M-Locks EM3520
option: other lock models (primary lock or possible secondary locks)
- Equipment shelf adjustable (height setting 85 mm)
option: additional shelf, inside locker, drawer, pull-out shelf, key rack
- Accessories option: alarm switch set, interior lighting

Model	Outside dimensions h x w x d (mm)	Inside dimensions h x w x d (mm)	SH	Volume (l)	Weight (appr. kg)
CP15RK / CP15RE	629 x 605 x 522	515 x 495 x 310	1	79	295
CP20RK / CP20RE	799 x 605 x 522	685 x 495 x 310	1	105	350
CP25RK / CP25RE	969 x 605 x 522	855 x 495 x 310	2	131	410
CP30RK / CP30RE	1139 x 605 x 522	1025 x 495 x 310	2	157	465
CP35RK / CP35RE	1309 x 605 x 522	1195 x 495 x 310	3	183	520
CP40RK / CP40RE	1479 x 605 x 522	1365 x 495 x 310	3	209	575

SH = Shelf

[Equipment options]

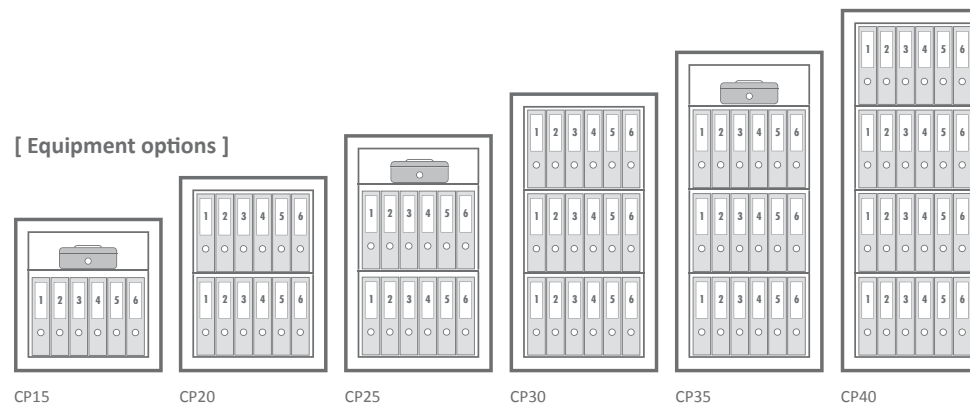

CP15

CP20

CP25

CP30

CP35

CP40