









-  EN1143-1
Burglary protection
-  VdS
Grade III
-  ECB-S
Grade III
-  Vso
Class EN 3
-  R2B
Class III E
-  DIN
4102 (light fire protection)



-  Domestic insurable
up to EUR 200.000
-  Commercial insurable
up to EUR 100.000

Fig. Safe CM30, hinge right
K-Lock S+G 2 keys (140 mm), 1 lockable drawer, 1 drawer, 1 pull-out shelf, 1 shelf

[Safes] [Type CM]

CM series safes fulfil all specifications required of the resistance grade III with minimal exterior dimensions. They offer the option of additional locks to give dual control and all models are pre-fitted to enable connection to a burglar alarm system.


[Product information]

- Hinge** DIN right – model designation R
option: DIN left
- Door opening angle** 180°
- Body** double-walled, reinforced, filled with armoured, high resistant barrier material
- Door structure** triple-walled, reinforced, filled with armoured, high resistant barrier material, internal boltwork protected by sheets of hardened steel to give extra anti-drill resistance
- Locking mechanism** boltwork with large steel bolts, protected by additional emergency re-lockers, continuous fixed full height bolt on the hinge side
- Anchoring** prepared for floor and rear wall anchoring
anchoring bolts and shields are supplied
option: additional anchoring holes (customer specifies position)
- Alarm connection** VdS-certified cable channels to allow connection to a burglar alarm system
- Colour** inside and outside RAL 7037 dusty grey
option: special colour according to RAL
- Lock** model designation K – double-bit lock VdS class 2, S+G 2 keys (140 mm)
model designation E – electronic lock VdS class 2, M-Locks EM3520
option: other lock models (primary lock or possible secondary locks)
- Equipment** shelf adjustable (height setting 85 mm)
option: additional shelf, inside locker, drawer, pull-out shelf, key rack
- Accessories** option: certified steel plinth to raise the level of the safe, fire protection door rebate seals, alarm switch set, interior lighting

Model	Outside dimensions h x w x d (mm)	Inside dimensions h x w x d (mm)	SH	Volume (l)	Weight (appr. kg)
CM15RK / CM15RE	595 x 575 x 495	515 x 495 x 310	1	79	280
CM20RK / CM20RE	765 x 575 x 495	685 x 495 x 310	1	105	335
CM25RK / CM25RE	935 x 575 x 495	855 x 495 x 310	2	131	390
CM30RK / CM30RE	1105 x 735 x 555	1025 x 655 x 370	2	248	565
CM35RK / CM35RE	1275 x 735 x 555	1195 x 655 x 370	3	290	635
CM40RK / CM40RE	1445 x 735 x 555	1365 x 655 x 370	3	331	705

SH = Shelf

[Equipment options]

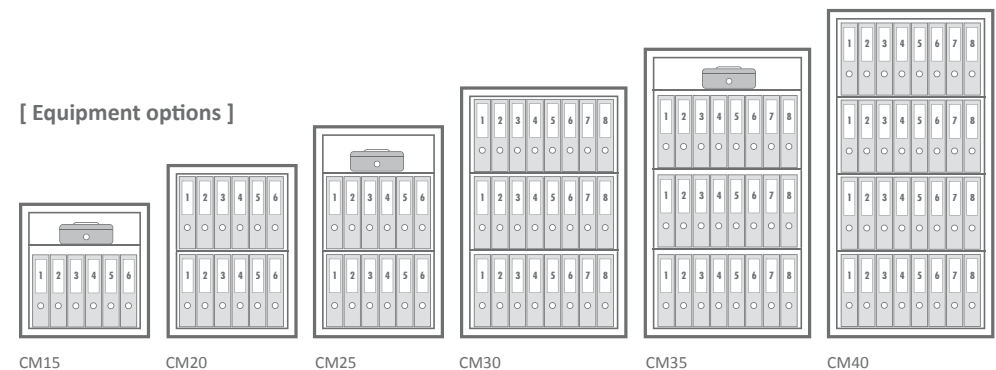

CM15

CM20

CM25

CM30

CM35

CM40