

# MC-CX301

## Short Throw 3LCD Projector



**Introducing our innovative short throw 3LCD MC-CX301 projector which combines all our technical expertise with our market leading knowledge.**

This short throw projector can produce 3100 ANSI, has a 10,000:1 contrast ratio and a resolution of 1024 x 768.

So whether you are on the move or in an office, our MC-CX301 short throw projector is the perfect solution for today's professionals. It combines portability and usability with powerful performance in a lightweight and compact design, enabling users to set it up and get working in seconds.

#### Key Features:

XGA 1024 x 768 resolution

3100 ANSI lumens/Colour light output

10,000:1 contrast ratio

Images up to 100" diagonal

Wired LAN, 2 HDMI ports

Filter life 4000 hours

3 year/6 month warranty\*


*Please note: Content, technical specifications and images are subject to change.*

*\*For education and extended warranties please contact your local dealer.*

# MC-CX301 Short Throw 3LCD Projector

## Technical Specifications

<b>Panel Size</b>	3LCD 16mm (0.63")	<b>Supported Languages</b> 33 languages: (English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkish, Arabian, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil), Indonesian, Vietnamese)
<b>Panel Structure</b>	3LCD	
<b>Resolution</b>	XGA (1024 x 768)	
<b>Light Output (Brightness) ANSI Lumens</b>	3100 (Normal), 2542 (Eco), 2077 (Eco-2)	
<b>Contrast Ratio</b>	10,000:1	
<b>Lamp Life (Hours)</b>	5000 (Normal), 8000 (Eco), 10000 (Eco-2)	
<b>Lens</b>	Built-in	
<b>Number of Colours</b>	16.7 million colors	
<b>Lens Zoom</b>	Digital Zoom x 1.35	
<b>Lens Focus</b>	Manual Focus	
<b>Projection Lens F Number</b>	8.08	
<b>Focus Distance</b>	0.691 – 1.838m	
<b>Distance to Width Ratio / Throw Ratio (:1)</b>	0.6	
<b>Diagonal Display Size</b>	60 – 100"	
<b>Speakers</b>	16W mono	
<b>Digital Keystone Correction (Degrees)</b>	Vertical ± 5°	
<b>Picture Modes</b>	Normal, Cinema, Dynamic, Board (Black), Board (Green), Whiteboard, Daytime, Photo	
<b>Picture Adjustments</b>	Aspect Selection (Video, Data, HDMI), Equalizing Digital Gamma Correction, Equalizing Colour Temperature Adjustment, 2-3 Pull Down for NTSC, Mirror Reverse Image, Up-Side Down Image, Progressive Scan	
<b>Operating Features</b>	MyScreen, My Memory, My Button (by remote control), My Text, My Source, picture modes (normal, cinema, dynamic, blackboard, whiteboard, greenboard, daytime, photo), source naming (English), whiteboard, greenboard, daytime, photo), source naming (English), resolution setting, filter timer, standby audio, template, closed caption (for NTSC & component 480i only), framelock, Eco Mode (normal, eco, intelligent eco, saver), ImageCare™, Accentualizer, HDCR, Image optimizer, Easy Scheduling, Cloning function	
<b>Network Features</b>	AMX Device Discovery Command Control via the Network, Configuring and Controlling the Projector via a Web Browser, Controlling the Projector via Scheduling (backup available), Crestron RoomView® (not accessible through the wireless adaptor), Displaying text data transferred via network failure and warning alerts via E-mail, My Image (still image transfer), display, network bridge, network presentation (PC still picture transfer), PjLink™, projector management via SNMP	
<b>Security Features</b>	Security bar, PIN-lock, MyScreen password, key lock (key pad and remote control), Kensington slot, My Text password	
<b>Digital Input</b>	HDMI x 2	
<b>Analogue Input</b>	15 pin Mini D-Sub x 2, RCA Jack x 1	
<b>Video Output</b>	15 pin Mini D-Sub x 1	
<b>Audio Input</b>	3.5mm Stereo Mini Jack x 2, RCA Jack (L/R) x 1	
<b>Audio Output</b>	3.5mm Stereo Mini Jack x 1	
<b>RS-232C Control</b>	1 x 9-pin D-Sub	
<b>Wireless LAN</b>	USB-WL-11N wireless adaptor (optional)	
<b>Wired LAN</b>	Yes	
<b>USB Type A</b>	USB type A x2 (PCless presentation, wireless adapter or optional pen tablet TB-1)	
<b>USB Type B</b>	Used for remote control mouse or PC screen display	
<b>Power Supply</b>	AC 100V – 120V / AC 220V – 240V (50/60Hz)	
<b>Operating Power Consumption</b>	320W	
<b>Standby Power Consumption</b>	Less than 0.35W	
<b>Weight</b>	3.6Kg	
<b>Dimensions (W x H x D)</b>	345 x 85 x 303mm	
<b>Noise (Normal)</b>	36dB (Normal), 32dB (Eco), 29dB (Eco-2)	
<b>Filter Life (Hours)</b>	4000 Hours	
<b>Certification</b>	UL60950-1/CUL, FCC Part 15 Subpart B Class B, CE Marking: EN61000-3-2, EN61000-3-3, EN55022 (Class B), EN55024 (EMC Directive), EN60950-1 (Low Voltage Directive), WEEE, ROHS, ERP (LOT6) Compliant, C-TICK Class B	
<b>Computer</b>	IBM Compatible VGA, SVGA, XGA, WXGA/WXGA+/SXGA/SXGA+/UXGA (compressed), MAC16"	
<b>Video</b>	525i (480i), 525p (480p), 625i (576i), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60)	
<b>Supplied Accessories</b>	Power Cable (1.8m) x1, Computer Cable (2m) x1, Lens Cap x1, IR Remote Control Unit x1, AA Batteries x2, Application CD (for network, etc.) x1, CD User Manual x1, Concise User Manual x1, USB Wireless Adapter Cover x1	
<b>Optional Accessories</b>	USB wireless adaptor USB-WL-11N. Wireless pen tablet TB-1.	
<b>Remote Control</b>	HL03035	
<b>Replacement Lamp / Filter</b>	DT01511	
<b>Projector / Lamp Warranty</b>	3 years/6 months (for education and extended warranties please contact your local dealer)	

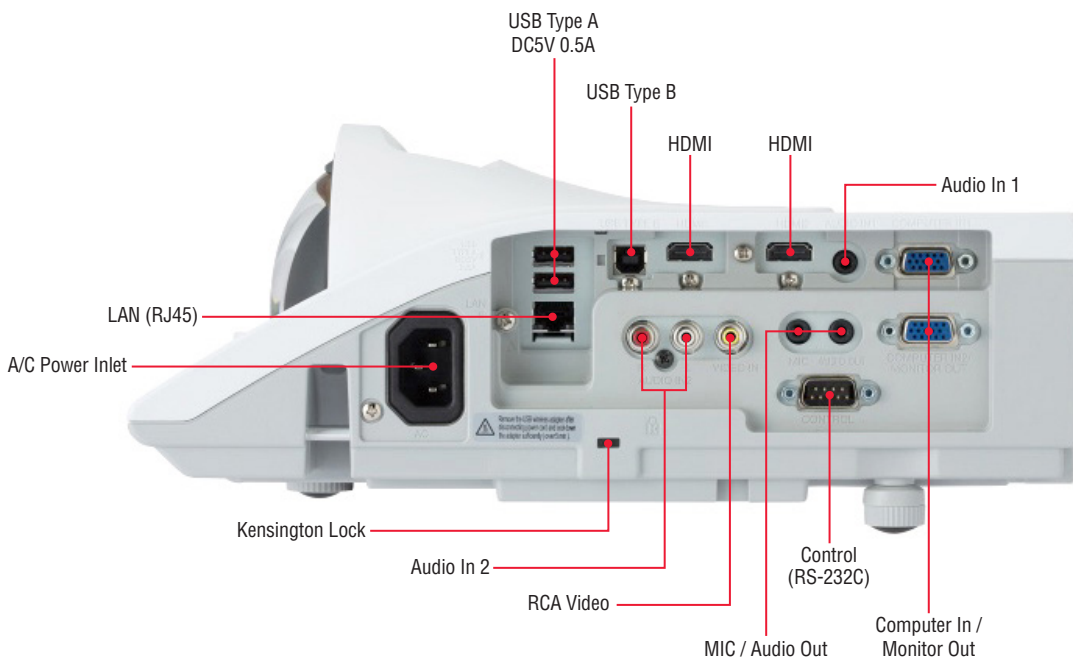

**maxell**  
Within, the Future

**Maxell Limited**  
Whitebrook Park  
Lower Cookham Road, Maidenhead  
Berkshire, SL68YA  
Tel: +44 (0)1628 585 000  
Fax: +44 (0)1628 585 163  
www.maxelldisplay.com

Specification and photography subject to change.