

# MC-WU5501

## 3LCD Projector



**PJLink™**

**CRESTRON**

**HDMI™**  
HIGH DEFINITION MULTIMEDIA INTERFACE

**AMX**

**3LCD**

**Introducing our innovative multi-purpose 3LCD MC-WU5501 projector which combines all our technical expertise with our market leading knowledge.**

This model can produce 5200 ANSI, has a 16,000:1 contrast ratio and a resolution of 1920 x 1200.

So whether you are on the move or in an office, our MC-WU5501 multi-purpose projector is the perfect solution for today's professionals. It combines portability and usability with powerful performance in a lightweight and compact design, enabling users to set it up and get working in seconds.

### Key Features:

WUXGA 1920 x 1200 resolution

5,200 ANSI lumens white / colour output

16,000:1 contrast ratio

Images up to 300" diagonal

Lens Shift, HDMI out

Built In edge blending and warping

Filter life 10,000 hours


3 year / 6 month warranty\*

# MC-WU5501 3LCD Lamp Projector

## Technical Specifications

<b>Panel Size</b>	3LCD 17mm (0.67")
<b>Panel Structure</b>	3LCD
<b>Light Source</b>	Lamp
<b>Resolution</b>	WUXGA (1920 x 1200)
<b>Light Output (Brightness) ANSI Lumens</b>	5200 (Normal), 3640 (Eco)
<b>Contrast Ratio</b>	16,000:1
<b>Lamp Life (Hours)</b>	4000 (Normal), 6000 (Eco)
<b>Number of colours</b>	16.7 million colours
<b>Lens</b>	Built-in
<b>Lens Zoom</b>	Manual Zoom x 1.7
<b>Lens Shift</b>	Manual Lens Shift
<b>Lens Focus</b>	Manual focus
<b>Lens Shift</b>	Vertical 0 – +50%; Horizontal +/-4.4%
<b>Projection Lens F Number</b>	19.8 - 33.9
<b>Focus Distance</b>	0.8 – 8.9m (Wide), 1.5 – 15.2m (Tele)
<b>Distance to Width Ratio/Throw Ratio (:1)</b>	1.4 – 2.3
<b>Diagonal Display Size</b>	30 – 300"
<b>Installation</b>	Ceiling, Tabletop, Rear
<b>Speakers</b>	16W mono
<b>Digital Keystone Correction (Degrees)</b>	Horizontal ± 30°, Vertical ± 30°
<b>Picture Modes</b>	Standard, Natural, Cinema, Dynamic, Board (Black), Board (Green), Whiteboard, Daytime, DICOM Sim.
<b>Picture Adjustments</b>	ASPECT selection (Normal/4:3/16:9/16:10/14:9/Zoom/Native), Perfect Fit (4 corners and 4 sides), Frame Lock (Data signal with vertical frequency of 49 to 51Hz, 59 to 61Hz), HDCR, Image blank by RS232C/Remote control, Image optimizer, Magnify, Mirror reverse image, Up-side down image
<b>Operating Features</b>	Accentualizer technology, Cloning function, DICOM simulation, Edge blending, HDCR (High Dynamic Contrast Range), Image Optimiser, Instant stack, Picture Shift, PbyP, PinP, Warping
<b>Network Features</b>	AMX Device Discovery, Command Control via the Network, Configuring and Controlling the Projector via a Web Browser, Controlling the Projector via Scheduling, Crestron RoomView® (Not accessible through the wireless adapter) Displaying text data transferred via network. Failure and Warning Alerts via E-mail My Image (still image transfer) Display Network Bridge, Network Presentation (PC still picture transfer) Frame rate (practical) is under 12fps (640x480 movie).PJLink™, Projector Management via SNMP

<b>Security</b>	PIN Security Lock, MyScreen Password Lock, Transition Detector, MyText Password Lock, Key Lock (Key pad, Remote Control)
<b>On Screen Display Languages</b>	English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkish, Arabic, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil), Indonesian, Vietnamese, Hebrew
<b>Digital Input</b>	HDMI x 2
<b>Analogue Input</b>	15 pin Mini D-Sub x 1, RCA Jack x 1
<b>Video Output</b>	15 pin Mini D-Sub x 1, HDMI x 1 (Supporting HDCP decoding)
<b>Audio Input</b>	3.5mm Stereo Mini Jack x1, RCA Jack (L/R) x 1
<b>Audio Output</b>	3.5mm Stereo Mini Jack x 1
<b>RS-232C Control</b>	1 x 9-pin D-Sub
<b>Wireless LAN</b>	USB-WL-11N wireless adaptor (optional)
<b>Wired LAN</b>	RJ45 connector x 1
<b>USB- Type-A</b>	USB Type A x 1 (wireless adapter)
<b>Power Supply</b>	AC 100V – 120V / AC 220V – 240V (50/60Hz)
<b>Operating Power Consumption</b>	420W
<b>Standby Power Consumption</b>	Less than 0.5W
<b>Weight</b>	6.8kg
<b>Dimensions (W x H x D)</b>	460 x 138 x 334mm
<b>Noise (Normal)</b>	38dB (Normal), 29dB (Eco)
<b>Filter Life (Hours)</b>	10,000 Hours
<b>Certification</b>	CE Marking: EN61000-3-2, EN61000-3-3, EN55032 (Class A), EN55024 (EMC Directive), EN60950-1 (Low Voltage Directive), WEEE/RoHS/ErP compliant
<b>Computer</b>	IBM Compatible VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, WSXGA+, UXGA, HD, WUXGA, MAC16"
<b>Video</b>	525i (480i), 525p (480p), 625i (576i), 625p (576p), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60)
<b>Supplied Accessories</b>	Power Cable (1.8m) x1, Computer Cable (1.8m) x1, IR Remote Control Unit x1, AA Batteries x2, Application CD (for network, etc.) x1, CD User Manual x1, Concise User, Manual x1, Security Label x1, Lens Cover x1 Adapter, Cover x1, Terminal Cover x1, HDMI Cable Holder x3, Cable Tie (large x1, medium x3), Hook Metal x1, Screw x1
<b>Optional Accessories</b>	USB wireless adaptor USB-WL-11N, Installation remote (HL02806)
<b>Filter/Lamp</b>	UX41161, DT01931
<b>Remote Control</b>	HL03037
<b>Projector/ Lamp Warranty</b>	3 years / 6 months (for education and extended warranties please contact your local dealer)

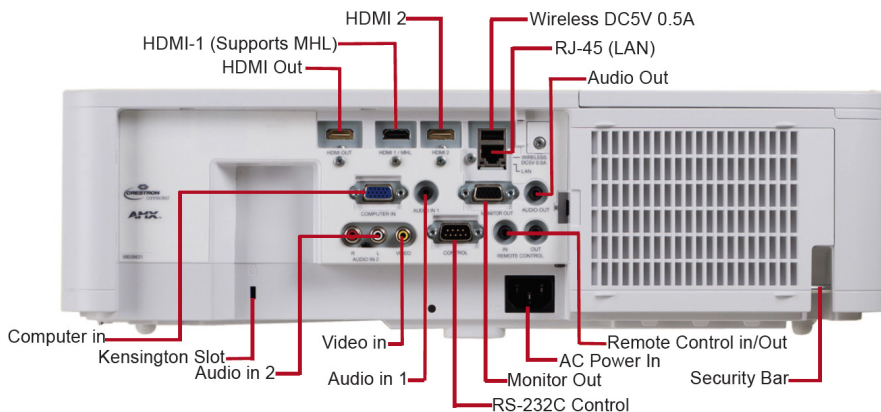

Dealer Stamp

**maxell**  
Within the Future

Maxell Limited  
Whitebrook Park, Lower Cookham Road,  
Maidenhead, Berkshire SL6 8YA,  
Tel: +44 (0)1628 585 000 / Fax: +44 (0)1628 585 163  
www.maxelldisplay.com