

# MC-WU8601W

## 3LCD Projector



**PJLink™**

**CRESTRON**

**HDBT™**

**Extron**  
**XTP**  
CERTIFIED

**HDMI™**  
HIGH DEFINITION MULTIMEDIA INTERFACE

**AMX**

**3LCD**

**Introducing our innovative multi-purpose 3LCD MC-WU8601W projector which combines all our technical expertise with our market leading knowledge.**

This multi-purpose projector can produce 6000 ANSI, has a 10000:1 contrast ratio and a resolution of 1920 x 1200.

So whether you are on the move or in an office, our MC-WU8601W multi-purpose projector is the perfect solution for today's professionals. It combines portability and usability with powerful performance in a lightweight and compact design, enabling users to set it up and get working in seconds.

### Key Features:

WUXGA 1920 x 1200 resolution

6000 ANSI lumens/Colour light output

10000:1 contrast ratio

Images up to 600" diagonal

Powered zoom and powered focus

Filter life 20,000 hours

3 year / 6 month warranty\*

Please note: Content, technical specifications and images are subject to change.


\*For education and extended warranties please contact your local dealer.

# MC-WU8601W 3LCD Projector

## Technical Specifications

<b>Panel Size</b>	3LCD 19mm (0.75")
<b>Panel Structure</b>	3LCD
<b>Light Source</b>	Lamp
<b>Resolution</b>	WUXGA (1920 x 1200)
<b>Light Output (Brightness) ANSI Lumens</b>	6000 (Normal), 4000 (Eco)
<b>Contrast Ratio</b>	10000:1
<b>Lamp Life (Hours)</b>	3000 (Normal), 4000 (Eco)
<b>Number of colours</b>	16.7 million colours
<b>Lens</b>	Interchangeable, not included
<b>Lens Zoom</b>	Powered Zoom x 1.7 (Standard Lens ML-713M)
<b>Lens Shift</b>	Motorized
<b>Lens Focus</b>	Powered Focus
<b>Lens Shift</b>	Vertical 0 – +55%; Horizontal +/-10% (Standard Lens ML-713M)
<b>Projection Lens F Number</b>	1.6 – 2.0 (using ML-713M)
<b>Focus Distance</b>	1.1 – 22.1m (Wide), 1.9 – 37.6m (Tele) (ML-713M)
<b>Distance to Width Ratio/Throw Ratio (:1)</b>	1.7 – 3.0 (ML-713M)
<b>Diagonal Display Size</b>	30 – 600" (FL-710M 100" – 350")
<b>Speakers</b>	8W Stereo
<b>Installation</b>	Ceiling, Tabletop, Rear
<b>Digital Keystone Correction (Degrees)</b>	Horizontal ±30°, Vertical ±30° (ML-713M)
<b>Picture Modes</b>	Standard, Naturall, Cinema, Dynamic, Board (Black), Board (Green), Whiteboard, Daytime, DICOM Sim
<b>Picture Adjustments</b>	ASPECT selection (Normal/4:3/16:9/16:10/14:9/Zoom/Native), Perfect Fit (4 corners and 4 sides), Frame Lock (Data signal with vertical frequency of 49 to 51Hz, 59 to 61Hz), HDCR, Image blank by RS232C/Remote control, Image optimizer, Magnify, Mirror reverse image, Up-side down image
<b>Operating Features</b>	Accentualizer and HDCR, Auto Power Off, Auto signal search & Source skip, Blending/Cropping, Closed Caption (CC1– 4, TEXT1– 4) support NTSC (Video) and 480i (Component signal), Direct Power On, Eco Mode (Normal, Eco), Equalizing Color temperature Adjustment, Equalizing Digital Gamma Correction, Filter timer, Frame Lock, , Image blank by RS232C/Remote control, LED lamps (Filter, Shutter, Security, Lamp-1, Lamp-2, Temp, Power), Lens memory (Lens shift position, Lens type), MAC address displayed on the side of projector, Remote control, Mechanical shutter, Mirror Reverse Image, Up-side Down Image, My Button by Remote control, My Memory, My source, My Text, MyScreen, Overscan (Video, Component video signal), capable of saving/loading the setup, Picture by Picture/Picture in Picture, Picture Freeze by RS-232C / Remote control.
<b>Network Features</b>	AMX Device Discovery, Command Control via the Network, Configuring and Controlling the Projector via a Web Browser, Controlling the Projector via Scheduling Crestron RoomView® (Not accessible through the wireless adapter), Displaying text data transferred via network, Failure and Warning Alerts via E-mail, My Image (still image transfer) Display, Network Bridge, Network Presentation (PC still picture transfer), Frame rate (practical) is under 12fps (640x480 movie). PjLink™, Projector Management via SNMP

<b>Security</b>	PIN Security Lock, MyScreen Password Lock, Transition Detector, My Text Password Lock, Key Lock (Key pad, Remote Control), Lens Lock
<b>On Screen Display Languages</b>	English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkey, Arabian, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese(Brazil), Indonesian, Vietnamese
<b>Digital Input</b>	HDMI x 2, HDBaseT x 1, DisplayPort x 1
<b>Analogue Input</b>	15 pin Mini D-Sub x 1, RCA Jack x1
<b>Video Output</b>	15 pin Mini D-Sub x 1
<b>Audio Input</b>	3.5mm Stereo Mini Jack x 2, RCA Jack (L/R) x 1
<b>Audio Output</b>	3.5mm Stereo Mini Jack x 1
<b>RS-232C Control</b>	1 x 9-pin D-Sub
<b>Wireless LAN</b>	USB-WL-11N wireless adaptor (optional)
<b>Wired LAN</b>	RJ45 connector x 1
<b>USB- Type-A</b>	USB Type A x 1 (wireless adapter)
<b>Power Supply</b>	AC 100V – 120V / AC 220V – 240V (50/60Hz)
<b>Operating Power Consumption</b>	500W
<b>Standby Power Consumption</b>	Less than 0.35W
<b>Weight</b>	11.1kg
<b>Dimensions (W x H X D)</b>	498 x 156 x 426mm
<b>Noise (Normal)</b>	35dB (Normal), 30dB (Eco)
<b>Filter Life ( Hours)</b>	20,000 Hours
<b>Certification</b>	CE Marking: EN61000-3-2, EN61000-3-3, EN55032 (Class A), EN55024 (EMC Directive), EN60950-1 (Low Voltage Directive), WEEE/RoHS compliant
<b>Computer</b>	IBM Compatible VGA, SVGA, XGA, WXGA, WXGA+, SXGA, WSXGA+, UXGA, WUXGA, MAC16"
<b>Video</b>	525i (480i), 525p (480p), 625i (576i), 625p (576p), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60)
<b>Supplied Accessories</b>	Power Cable (1.8m) x1, Computer Cable (2m) x1, IR Remote Control Unit x1, AA Batteries x2, Application CD (for network, etc.) x1, CD User Manual x1, Concise User Manual x1, Security Label x1, Lens Hole Cover x1, Adapter Cover x1, Terminal Cover x1, HDMI Cable Holder x2, Cable Tie x2
<b>Optional Accessories</b>	USB wireless adapter USB-WL-11N, Wireless pen tablet TB-1, Optional Lenses: Ultra-short-throw FL-710M, Short-throw USL-701M, Short-throw FL-701M, Short-throw SL-712M, Standard-throw ML-713M, Long-throw LL-704M, Ultra-long-throw UL-705M
<b>Filter/Lamp</b>	UX40821 / DT01871M
<b>Remote Control</b>	HL02805
<b>Projector/ Lamp Warranty</b>	3 years / 6 months (for education and extended warranties please contact your local dealer)

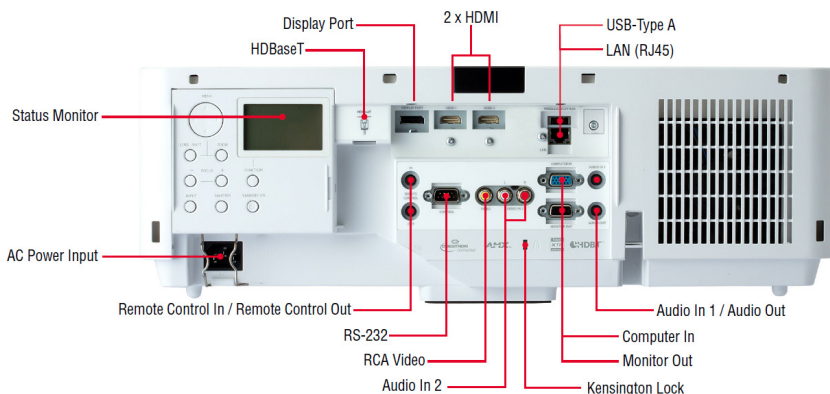

Dealer Stamp

**maxell**  
Within the Future

Maxell Limited  
Whitebrook Park, Lower Cookham Road,  
Maidenhead, Berkshire SL6 8YA,  
Tel: +44 (0)1628 585 000 / Fax: +44 (0)1628 585 163  
www.maxelldisplay.com