

MC-WX8265

3LCD Projector



PJLink™

CRESTRON

HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

AMX

3LCD

Introducing our innovative 3LCD MC-WX8265 projector which combines all our technical expertise with our market leading knowledge.

This 3LCD projector can produce 6500 ANSI, has a 3000:1 contrast ratio and a resolution of 1280 x 800.

So whether you are on the move or in an office, our MC-WX8265 3LCD projector is the perfect solution for today's professionals.

Key Features:

WXGA 1280 x 800 resolution

6500 ANSI lumens/Colour light output

3000:1 contrast ratio

Images up to 600" diagonal

Powered zoom and powered focus

6 optional lenses with standard lens included

Filter life 20,000 hours


3 year / 6 month warranty*

MC-WX8265 3LCD Lamp Projector

Technical Specifications

Panel Size	3LCD 19mm (0.75")
Panel Structure	3LCD
Light Source	Lamp
Resolution	WXGA (1280 x 800)
Light Output (Brightness) ANSI Lumens	6500 (Normal), 5200 (Eco)
Contrast Ratio	3000:1
Lamp Life (Hours)	2000 (Normal), 2500 (Eco)
Number of colours	16.7 million colours
Lens	Interchangeable, Standard ML-713M included
Lens Zoom	Powered Zoom x 1.7 (Standard Lens ML-713M)
Lens Shift	Motorized
Lens Focus	Powered Focus
Lens Shift	Vertical 0 – +55%; Horizontal +/-10% (Standard Lens ML-713M)
Projection Lens F Number	1.6 – 2.0 (using ML-713M)
Focus Distance	1.0 – 19.7m (Wide), 2.0 – 39.0m (Tele) (ML-713M)
Distance to Width Ratio/Throw Ratio (:1)	1.5 – 3.0 (ML-713M)
Diagonal Display Size	30 – 600"
Installation	Ceiling, Tabletop, Rear
Digital Keystone Correction (Degrees)	Horizontal ± 35°, Vertical ± 35°
Picture Modes	Normal, Cinema, Dynamic, Board (Black), Board (Green), Whiteboard, Daytime, DICOM Sim
Picture Adjustments	ASPECT selection (Normal/4:3/16:9/16:10/14:9/Zoom/Native), Perfect Fit (4 corners and 4 sides), Frame Lock (Data signal with vertical frequency of 49 to 51Hz, 59 to 61Hz), HDCR, Image blank by RS232C/Remote control, Image optimizer, Magnify, Mirror reverse image, Up-side down image
Operating Features	Accentualizer and HDCR, Auto Power Off, Auto signal search & Source skip, Blending/Cropping, Closed Caption (CC1– 4, TEXT1– 4) support NTSC (Video) and 480i (Component signal), Direct Power On, Eco Mode (Normal, Eco), Equalizing Color temperature Adjustment, Equalizing Digital Gamma Correction, Filter timer, Frame Lock, , Image blank by RS232C/Remote control, LED lamps (Filter, Shutter, Security, Lamp–1, Lamp–2, Temp, Power), Lens memory (Lens shift position, Lens type), MAC address displayed on the side of projector, Remote control, Mechanical shutter, Mirror Reverse Image, Up–side Down Image, My Button by Remote control, My Memory, My source, My Text, MyScreen, Overscan (Video, Component video signal), capable of saving/loading the setup, Picture by Picture/Picture in Picture, Picture Freeze by RS–232C / Remote control,
Network Features	AMX Device Discovery, Command Control via the Network, Configuring and Controlling the Projector via a Web Browser, Controlling the Projector via Scheduling Crestron RoomView® (Not accessible through the wireless adaptor), Displaying text data transferred via network, Failure and Warning Alerts via E-mail, My Image (still image transfer) Display, Network Bridge, Network Presentation (PC still picture transfer), Frame rate (practical) is under 12fps (640x480 movie). PJLink™, Projector Management via SNMP

Security	PIN Security Lock, MyScreen Password Lock, Transition Detector, MyText Password Lock, Key Lock (Key pad, Remote Control)
On Screen Display Languages	English, French, Spanish, German, Italian, Norwegian, Dutch, Portuguese, Simplified Chinese, Polish, Traditional Chinese, Korean, Swedish, Russian, Finnish
Digital Input	HDMI x 2 (HDCP compliant)
Analogue Input	15 pin Mini D-Sub x 1, Mini-Din 4 pin x 1, RCA Jack x 1, S–Video RCA Jack x 3, BNC x 5
Video Output	15 pin Mini D-Sub x 1
Audio Input	3.5mm Stereo Mini Jack x 2, RCA Jack (L/R) x 1
Audio Output	RCA Jack (L/R) x 2
RS-232C Control	1 x 9-pin D-Sub
Wireless LAN	USB-WL-11N wireless adaptor (optional)
Wired LAN	RJ45 connector x 1
USB- Type-A	USB Type A x 2 (PC less presentation, wireless adaptor or optional pen tablet TB-1)
USB- Type-B	USB Type B x 1 (USB display or USB mouse control)
Power Supply	AC 100V – 120V / AC 220V – 240V (50/60Hz)
Operating Power Consumption	480W
Standby Power Consumption	Less than 0.5W
Weight	8.8kg
Dimensions (W x H X D)	498 x 135 x 396mm
Noise (Normal)	39dB (Normal), 33dB (Eco)
Filter Life (Hours)	20,000 Hours
Certification	CE Marking: EN61000-3-2, EN61000-3-3, EN55032 (Class A), EN55024 (EMC Directive), EN60950-1 (Low Voltage Directive), WEEE/RoHS compliant
Computer	IBM Compatible VGA, SVGA, XGA, WXGA, WXGA+ / SXGA/WSXGA+ / UXGA (Compressed), MAC16"
Video	525i (480i), 525p (480p), 625i (576i), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60)
Supplied Accessories	Power Cable (1.8m) x1, Computer Cable (2m) x1, IR Remote Control Unit x1, AA Batteries x2, Application CD (for network, etc.) x1, CD User Manual x1, Concise User Manual x1, Security Label x1, Lens Cover x1, Adapter Cover x1
Optional Accessories	USB wireless adaptor USB-WL-11N, Wireless pen tablet TB-1, Optional Lenses: Short-throw FL-701M, Short-throw SL-712M, Standard-throw ML-713M, Long-throw LL-704M, Ultra-long-throw UL-705M
Filter/Lamp	UX38242 / DT01471M
Remote Control	HL02801
Projector/ Lamp Warranty	3 years / 6 months (for education and extended warranties please contact your local dealer)

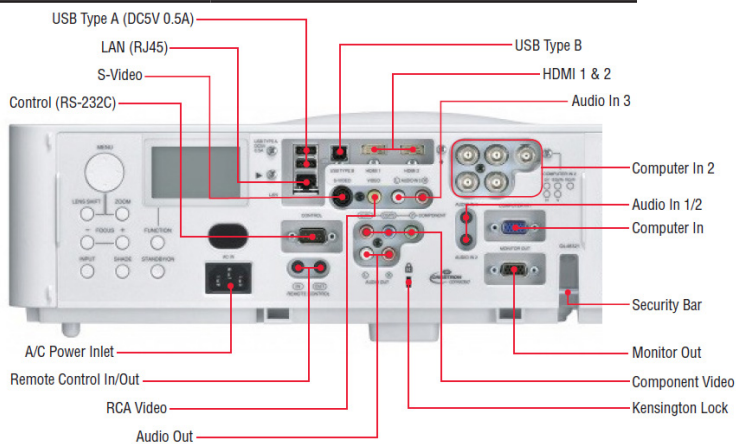

Dealer Stamp

maxell
Within the Future

Maxell Limited
Whitebrook Park, Lower Cookham Road,
Maidenhead, Berkshire SL6 8YA,
Tel: +44 (0)1628 585 000 / Fax: +44 (0)1628 585 163
www.maxelldisplay.com