








-  EN1143-1
Burglary protection
-  VdS
Grade II
-  ECB-S
Grade II
-  ISO
Class EN 2
-  R2B
Class II E
-  DIN
4102 (light fire protection)



-  Domestic insurable
up to EUR 100.000
-  Commercial insurable
up to EUR 50.000

Fig. Safe BWS1000, hinge right
K-Lock Cawi 2 keys (95 mm), 2 shelves

[Safes]


[Type BWS]

BWS series safes offer a roomy interior with relatively low transportation weight. All models are pre-fitted to enable connection to a burglar alarm system. Armoured, high resistant barrier material ensures a grade II classification.

[Product information]

- Hinge** DIN right – model designation R
option: DIN left
- Door opening angle** 180°
- Body** double-walled, filled with armoured, high resistant barrier material
- Door structure** triple-walled, filled with armoured, high resistant barrier material, internal boltwork protected by sheets of hardened steel to give extra anti-drill resistance
- Locking mechanism** three-way moving boltwork with large steel bolts protected by additional emergency re-lockers, continuous fixed full height bolt on the hinge side
- Anchoring** prepared for floor and rear wall anchoring
anchoring bolts and shields are supplied
option: additional anchoring holes (customer specifies position)
- Alarm connection** VdS-certified cable channels to allow connection to a burglar alarm system
- Colour** inside and outside RAL 7035 light grey
option: special colour according to RAL
- Lock** model designation K – double-bit lock VdS class 1, Cawi 2 keys (95 mm)
model designation E – electronic lock VdS class 2, M-Locks EM3520
option: other lock models (primary lock or possible secondary locks)
- Equipment** shelf adjustable (height setting 60 mm, BWS1500 90 mm)
option: additional shelf, inside locker
- Accessories** option: certified steel plinth to raise the level of the safe, fire protection door rebate seals, alarm switch set, interior lighting

[Equipment options]

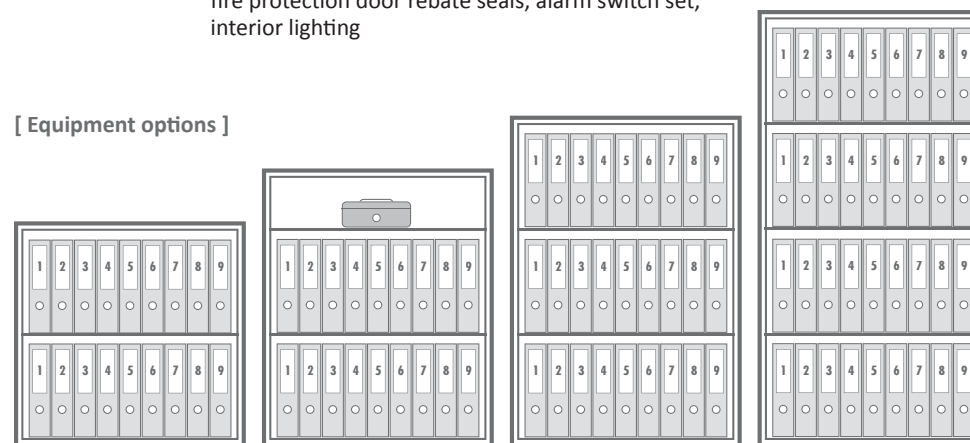

BWS0800

BWS1000

BWS1200

BWS1500

Model	Outside dimensions h x w x d (mm)	Inside dimensions h x w x d (mm)	SH	Volume (l)	Weight (appr. kg)
BWS0800RK / BWS0800RE	770 x 790 x 650	720 x 740 x 525	1	280	340
BWS1000RK / BWS1000RE	950 x 790 x 650	900 x 740 x 525	2	350	395
BWS1200RK / BWS1200RE	1130 x 790 x 650	1080 x 740 x 525	2	420	450
BWS1500RK / BWS1500RE	1490 x 790 x 650	1440 x 740 x 525	3	559	560

SH = Shelf

Please add 60 mm to the listed outside depth for mountings.